

1248665

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

November 12, 2004

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM
THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK
OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT
APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A
FILING DATE.

APPLICATION NUMBER: 60/509,820

FILING DATE: *October 08, 2003*

RELATED PCT APPLICATION NUMBER: PCT/US04/33540

Certified by



Jon W Dudas

Acting Under Secretary of Commerce
for Intellectual Property
and Acting Director of the U.S.
Patent and Trademark Office



BEST AVAILABLE COPY

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

PROVISIONAL APPLICATION FOR PATENT COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53(c).

Express Mail Label No. _____

U.S. PTO
607509820
10803


INVENTOR(S)

Given Name (first and middle [if any])	Family Name or Surname	Residence (City and either State or Foreign Country)
Brian E. Joshua D. John P.	Boehmer Crews Erspamer	Bartlett, Tennessee Memphis, Tennessee Lakeland, Tennessee

Additional inventors are being named on the _____ separately numbered sheets attached hereto

TITLE OF THE INVENTION (500 characters max)

LATENT CARBON DIOXIDE GENERATING MATERIAL

Direct all correspondence to: **CORRESPONDENCE ADDRESS** Customer Number:

07278

OR

<input type="checkbox"/> Firm or Individual Name	Sandra S. Lee DARBY & DARBY P.C.				
Address	P.O. Box 5257				
City	New York	State	NY	Zip	10150-5257
Country	US	Telephone	(212) 527-7700	Fax	(212) 753-6237

ENCLOSED APPLICATION PARTS (check all that apply)

<input checked="" type="checkbox"/> Specification Number of Pages	12	<input type="checkbox"/> CD(s), Number	_____
<input checked="" type="checkbox"/> Drawing(s) Number of Sheets	1	<input type="checkbox"/> Other	_____
<input checked="" type="checkbox"/> Application Data Sheet. See 37 CFR 1.76 (specify): _____			

METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT Applicant claims small entity status. See 37 CFR 1.27. A check or money order is enclosed to cover the filing fees. The Director is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number: 04-0100

FILING FEE AMOUNT (\$)

160.00

 Payment by credit card. Form PTO-2038 is attached.

The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.

 No Yes, the name of the U.S. Government agency and the Government contract number are: _____

[Page 1 of 1]

Respectfully submitted,

Date October 8, 2003

SIGNATURE

Sandra Lee

TYPED OR

PRINTED NAME

Sandra S. Lee

REGISTRATION NO.

(if appropriate) 51,932

TELEPHONE

(212) 527-7735

Docket Number: 01313/0200131-US0

USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT

BEST AVAILABLE COPY

Express Mail Label No. _____

Dated: _____

14029 U.S. PTO

**FEE TRANSMITTAL
for FY 2003**

Patent fees are subject to annual revision.

Applicant claims small entity status. See 37 CFR 1.27

TOTAL AMOUNT OF PAYMENT (\$ 160.00)

<i>Complete if Known</i>	
Application Number	Not Yet Assigned
Filing Date	Concurrently
First Named Inventor	Brian E. Boehmer
Examiner Name	Not Yet Assigned
Group Art Unit	N/A
Attorney Docket No.	01313/0200131-US0

METHOD OF PAYMENT (check all that apply)

Check Credit Card Money Order Other None

Deposit Account

Deposit Account Number

Deposit Account Name

The Commissioner is hereby authorized to: (check all that apply)

- Charge fee(s) indicated below Credit any overpayments
 Charge any additional fee(s) during the pendency of this application
 Charge fee(s) indicated below, except for the filing fee

to the above-identified deposit account.

FEE CALCULATION (continued)

3. ADDITIONAL FEES

Large Entity Small Entity

Fee Code (\$)	Fee Code (\$)	Fee Description	Fee Paid
1051 130	2051 65	Surcharge - late filing fee or oath	<input type="checkbox"/>
1052 50	2052 25	Surcharge - late provisional filing fee or cover sheet.	<input type="checkbox"/>
1053 130	1053 130	Non-English specification	<input type="checkbox"/>
1812 2,520	1812 2,520	For filing a request for ex parte reexamination	<input type="checkbox"/>
1804 920*	1804 920*	Requesting publication of SIR prior to Examiner action	<input type="checkbox"/>
1805 1,840*	1805 1,840*	Requesting publication of SIR after Examiner action	<input type="checkbox"/>
1251 110	2251 55	Extension for reply within first month	<input type="checkbox"/>
1252 400	2252 200	Extension for reply within second month	<input type="checkbox"/>
1253 920	2253 460	Extension for reply within third month	<input type="checkbox"/>
1254 1,440	2254 720	Extension for reply within fourth month	<input type="checkbox"/>
1255 1,960	2255 980	Extension for reply within fifth month	<input type="checkbox"/>
1401 320	2401 160	Notice of Appeal	<input type="checkbox"/>
1402 320	2402 160	Filing a brief in support of an appeal	<input type="checkbox"/>
1403 280	2403 140	Request for oral hearing	<input type="checkbox"/>
1451 1,510	1451 1,510	Petition to institute a public use proceeding	<input type="checkbox"/>
1452 110	2452 55	Petition to revive - unavoidable	<input type="checkbox"/>
1453 1,280	2453 640	Petition to revive - unintentional	<input type="checkbox"/>
1501 1,280	2501 640	Utility issue fee (or reissue)	<input type="checkbox"/>
1502 460	2502 230	Design issue fee	<input type="checkbox"/>
1503 620	2503 310	Plant issue fee	<input type="checkbox"/>
1460 130	1460 130	Petitions to the Commissioner	<input type="checkbox"/>
1807 50	1807 50	Processing fee under 37 CFR 1.17(q)	<input type="checkbox"/>
1808 180	1808 180	Submission of Information Disclosure Stmt	<input type="checkbox"/>
8021 40	8021 40	Recording each patent assignment per property (times number of properties)	<input type="checkbox"/>
1809 740	2809 370	Filing a submission after final rejection (37 CFR 1.129(a))	<input type="checkbox"/>
1810 740	2810 370	For each additional invention to be examined (37 CFR 1.129(b))	<input type="checkbox"/>
1801 740	2801 370	Request for Continued Examination (RCE)	<input type="checkbox"/>
1802 900	1802 900	Request for expedited examination of a design application	<input type="checkbox"/>
Other fee (specify)			<input type="checkbox"/>

*Reduced by Basic Filing Fee Paid

SUBTOTAL (3) (\$ 0.00)

*** or number previously paid, if greater; For Reissues, see above*

SUBMITTED BY

Name (Print/Type)	Sandra S. Lee	Registration No. (Attorney/Agent)	51,932	Telephone	(212) 527-7735
Signature	<i>Sandra Lee</i>			Date	October 8, 2003

BEST AVAILABLE COPY

Certificate of Express Mailing Under 37 CFR 1.10

I hereby certify that this correspondence is being deposited with the United States Postal Service as Express Mail, Airbill No. in an envelope addressed to:

a982102034-US

MS Provisional Patent Application
Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

on October 8, 2003
Date

D. Davis

Signature

D. Davis

Typed or printed name of person signing Certificate

Note: Each paper must have its own certificate of mailing, or this certificate must identify each submitted paper.

Specification (12 pages);
Claims (7 pages, claims 1-49);
Drawings (1 sheet);
Provisional Patent Application Transmittal (1 page);
Application Data Sheet (3 pages);
Fee Transmittal for FY 2003 (1 page); and
Check in the amount of \$160.00 (Ch. No. 2864).

BEST AVAILABLE COPY

EXPRESS MAIL CERTIFICATE

Date _____ Label No. _____
I hereby certify that, on the date indicated above, this paper or fee
was deposited with the U.S. Postal Service & that it was
addressed for delivery to the Mail Stop Provisional Patent
Application, Commissioner for Patents, PO BOX 1450, Alexandria,
VA 22313-1450 by "Express Mail Post Office to Addressee"
service.

**PLEASE CHARGE ANY DEFICIENCY UP TO \$300.00 OR
CREDIT ANY EXCESS IN THE FEES DUE WITH THIS
DOCUMENT TO OUR DEPOSIT ACCOUNT NO. 04 - 0100**

Name (Print)

Signature

Customer No.: 07278

File No.: 1313/0200131-US0

5

LATENT CARBON DIOXIDE GENERATING MATERIAL

FIELD OF THE INVENTION

This invention relates to nonwoven materials containing a chemical composition capable of generating carbon dioxide when activated.

10

BACKGROUND OF THE INVENTION

It is known in the state of the art that the freshness of fruits and vegetables and other perishable food and agricultural materials can be preserved by the use of an environment rich in carbon dioxide. US Patent No. 5,489,399, hereby incorporated

15 herein by reference in its entirety, discloses various materials useful in carbon dioxide gas generating compositions. This disclosure teaches that the carbon dioxide gas generating composition is usually packed into a bag made of nonwoven fabric, woven fabric, film formed with fine pores not passing a liquid therethrough or composite sheet of such materials and then placed in a package with fruit or vegetables. The disclosure teaches
20 that either the alkali carbonate or the acid of the composition must be of low solubility, since if both are highly soluble the composition itself became liquid.

SUMMARY OF THE INVENTION

It would be advantageous to have a delivery system for carbon dioxide gas
25 generating compositions without the disadvantages of the prior art systems.

This invention provides a nonwoven carrier for carbon dioxide gas generating compositions which is a latent carbon dioxide gas generating material capable of activation under conditions of use so that a local environment rich in carbon dioxide may be established. As opposed to the prior art where all or most of the gas generating composition for a given container of produce is placed in a single location within the container, this invention provides a distribution of the particles or powder of the carbon dioxide gas generating composition throughout a substantial portion of the nonwoven carrier, which may then be installed in the container in any manner desired. Regardless of how the material is placed in a container, horizontal, vertical or otherwise, most of the powder is retained within the nonwoven carrier. The gas generating composition is activated by the absorption of water, which facilitates the chemical reaction of the acid and the base to produce carbon dioxide.

The prior art issue of the gas generating composition itself becoming liquid, either before, during or after reaction to form carbon dioxide, is obviated by distribution of the composition throughout a substantial portion of the nonwoven structure, which is produced from absorbent material which will absorb and retain any liquefied aspect of the composition within the material.

This invention provides a latent carbon dioxide gas generating material comprising:

- 20 (A) layer 1 containing fiber and a binder, having a basis weight of from about 25 gsm to about 100 gsm and having inner and outer surfaces,
- 25 (B) layer 2 containing a carbon dioxide gas generating composition, having a basis weight of from about 5 gsm to about 300 gsm and having upper and lower surfaces, and
- 25 (C) layer 3 containing fiber and a binder, having a basis weight of from about 25 gsm to about 100 gsm and having inner and outer surfaces, where the inner surface of layer 1 is in contact with the upper surface of layer 2 and the inner surface of layer 3 is in contact with the lower surface of layer 2.

BRIEF DESCRIPTION OF THE FIGURE

Figure 1 shows plots of the generation of carbon dioxide measured by IR as a function of time for material having basis weights for the carbon dioxide gas generating composition of 5.6 gsm from Example 1, 11.3 gsm from Example 2, 22.5 gsm from 5 Example 3 and 33.8 gsm from Example 4.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The latent carbon dioxide gas generating material of this invention comprises three layers, layers 1 and 3 containing fiber and binder which are above and below layer 10 2 which contains the carbon dioxide gas generating composition along with fiber and binder if desired. During early stages of manufacture, the gas generating composition, which may be powder, particulate or granular in form, has considerable freedom to move or migrate within layer 2 and to some extent into layer 1 and or layer 3, becoming intermingled with and dispersed within the fibrous structure. This movement may be 15 slowed, directed or stopped altogether by the appropriate use and activation of binders in the material. While it is desirable for the gas generating composition to be distributed within the fibrous structure, it should not contribute to a dusting problem in the finished product, and it should be relatively if not totally immobile in the finished product. Thus, the finished material can be used in a wide variety of ways.

20 Layer 1 and layer 3 may be identical, similar or quite different in composition and properties. These layers have inner and outer surfaces, with the inner surface of each layer being in contact with one of the surfaces of layer 3. In the case where layer 2 is simply the gas generating composition with little or no fiber and binder, the particles of the gas generating composition may migrate into the fibrous structure of layer 1 and or 25 layer 3, leaving areas of layer 1 and layer 3 intermittently in direct contact. This not the case where layer 2 contains fiber and binder, which effectively separates layer1 from layer 3.

The fiber of layer 1, layer 3 and when present in layer 2 may be cellulosic fiber, synthetic fiber or a mixture thereof. A preferred embodiment uses cellulosic fiber. The 30 fiber composition of the layers may be identical or different.

In a preferred embodiment of the material of this invention, the fiber and binder of a layer is from about 60 weight percent to about 95 weight percent fiber and from about 5 weight percent to about 40 weight percent binder, where the weight percentages are based on the total weight of fiber and binder in the layer.

5 The binder of layer 1, layer 3 and when present in layer 2 may be a synthetic binder fiber, a latex or a combination thereof. The binder composition of the layers may be identical or different. In one embodiment it is desirable that one or more layers contain a synthetic binder fiber in combination with a latex binder. In that case, the binder of the layer is a combination of from about 25 weight percent to about 75 weight
10 percent synthetic binder fiber and from about 75 weight percent to about 25 weight percent latex where the weight percentages are based on the total weight of binder in the layer and the weight percent latex includes latex solids and fluid carrier. When a binder fiber, such as, for example, bicomponent fiber is used, it is generally mixed with fiber of the layer. When a latex binder is used, it may be applied to either or both of the surfaces
15 of a layer.

The carbon dioxide gas generating composition of layer 2 contains a weak base and a weak acid or a salt which is convertible into an acid. Generally, the weak acid has a solubility of 0.5 g/100 g of water or greater at 30°C, and has a melting point of 30°C or greater. Examples of acids are citric acid, tartaric acid, succinic acid, fumaric acid,
20 maleic acid, adipic acid, malic acid, oxalic acid, malonic acid, glutaric acid, phthalic acid, metaphosphoric acid, or wherein the salt which is convertible into an acid is an alkali metal salt of citric acid, tartaric acid, succinic acid, fumaric acid, maleic acid, adipic acid, malic acid, oxalic acid, malonic acid, glutaric acid, phthalic acid, metaphosphoric acid or a mixture thereof. Examples of salts which are convertible into acids are aluminum
25 sulfate, calcium phosphate, alum, a double salt of an alum, potassium aluminum sulfate, sodium dihydrogen phosphate, potassium citrate, sodium maleate, potassium tartrate, sodium fumarate.

Generally, the weak base contains anionic carbonate or hydrogen carbonate, and, generally, the base contains as a cation an alkali metal, an alkaline earth metal or a
30 transition metal. Examples of bases suitable for use in the practice of this invention are lead carbonate, calcium carbonate, barium carbonate, strontium carbonate, magnesium

carbonate, beryllium carbonate, lithium carbonate, sodium carbonate, potassium carbonate, rubidium carbonate, cesium carbonate, lead hydrogen carbonate, calcium hydrogen carbonate, barium hydrogen carbonate, strontium hydrogen carbonate, magnesium hydrogen carbonate, beryllium hydrogen carbonate, lithium hydrogen carbonate, sodium hydrogen carbonate, potassium hydrogen carbonate, rubidium hydrogen carbonate, cesium hydrogen carbonate, or a mixture thereof.

5 In a preferred composition the acid is citric acid and base is sodium hydrogen carbonate.

It is desirable that the ratio by weight of acid to base in the carbon dioxide gas
10 generating composition is from about 10:1 to about 1:10, preferably, that the ratio by weight of acid to base in the carbon dioxide gas generating composition is from about 5:1 to about 1:5. It is desirable that the ratio of equivalents of acid to equivalents of base in the carbon dioxide gas generating composition is from about 5:1 to about 1:5, preferably, that the ratio of equivalent of acid to equivalents of base in the carbon dioxide gas
15 generating composition is from about 3:2 to about 2:3

In another aspect of this invention, the latent carbon dioxide gas generating material further comprises a carrier having a basis weight of from about 10 gsm to about 40 gsm which is in contact with the outer surface of layer 1 or layer 3. The carrier may be a cellulosic tissue carrier or made of synthetic material, such as, for example, a
20 polyolefin or polyester.

Desirably, the latent carbon dioxide gas generating material of this invention has a basis weight of from about 65 gsm to about 500 gsm. One desirable embodiment has a basis weight of from about 65 gsm to about 140 gsm, while an alternative desirable embodiment has a basis weight of from about 141 gsm to about 300 gsm, and another
25 desirable embodiment has a basis weight of from about 301 gsm to about 500 gsm.

The carbon dioxide gas generating composition may be from about 3 weight percent to about 60 weight percent of the latent carbon dioxide gas generating material. In one embodiment, the carbon dioxide gas generating composition is from about 3 weight percent to about 20 weight percent based on the total weight of the material, while
30 in another embodiment, the carbon dioxide gas generating composition is from about 21 weight percent to about 40 weight percent based on the total weight of the material, and

in a further embodiment, the carbon dioxide gas generating composition is from about 41 weight percent to about 60 weight percent based on the total weight of the material.

In one embodiment of this invention, the carbon dioxide gas generating composition contains a hydrophilic material with a hygroscopicity of from about 5 weight percent to about 250 weight percent based on the weight of the hydrophilic material at 30°C. The hydrophilic material may be a saccharide or derivative thereof, polyhydric alcohol or derivative thereof, polyacrylamide or derivative thereof, polyelectrolyte or a water absorbing polymer. Examples of hydrophilic materials are erythrose, threose, arabinose, xylose, lyxose, glucose, fructose, mannose, galactose, 10 sorbitol, gluconic acid, sucrose, lactose, maltose, dextrin, amylose and hydroxymethyl cellulose.

The carbon dioxide gas generating composition may contain a hydrophobic material, such as, for example, a wax, a fatty acid or a salt or ester of a fatty acid.

There are a number of manufacturing processes that can be used to produce the 15 latent carbon dioxide gas generating material of this invention. For example, one manufacturing process is an airlaid process which is used to produce an airlaid web which is typically prepared by disintegrating or defiberizing a pulp sheet or sheets typically by a hammermill to provide substantially opened fibers. The opened fibers are then air conveyed to forming heads on the airlaid web forming machine. Several 20 manufacturers make defiberized pulp sheet airlaid web forming machines including M&J Fibretech of Denmark and Dan-Web, also of Denmark. The forming heads can include rotating or agitated drums, generally in a race track configuration which serve to maintain fiber separation until the fibers are pulled by vacuum onto a foraminous condensing drum or foraminous forming conveyor. Other fibers, such as a synthetic thermoplastic fiber, or 25 superabsorbent fiber can also be introduced to the forming head through a fiber dosing system which includes a fiber opening, a dosing unit and an air conveyor. Non-fibrous materials, such as, for example a carbon dioxide gas generating composition and various additives, such as, for example, a hydrophilic material such as a superabsorbent polymer (SAP) or a hydrophobic material in powder form, particulate or granules can also be 30 added to the forming head by a dosing system.

Typically, the airlaid web is transferred from the condensing drum or forming conveyor to a calender or other densification stage to densify the web, increase its strength and control web thickness. The fibers of the web are then bonded by application of a latex spray or foam addition system, followed by drying or curing. Alternatively, or 5 additionally, any thermoplastic fiber present in the web can be softened or partially melted by application of heat to bond the fibers of the web. The bonded web can then be calendered a second time to increase strength or emboss the web with a design or pattern. If thermoplastic fibers are present, hot calendering can be employed to impart patterned bonding to the web. Water can be added to the web if necessary to maintain specified or 10 desired moisture content, to minimize dusting and to reduce the buildup of static electricity.

The airlaid manufacturing system has the advantage that it is a continuous process which employs a series of unit operations to produce a unitary material. Alternatively, various elements of the material can be produced as individual components and then 15 assembled in a converting operation.

The bulk fibers of the present invention may be natural, synthetic, or a mixture thereof. In one embodiment, the fibers may be cellulose-based pulp fibers, one or more synthetic fibers, or a mixture thereof. Any cellulose fibers known in the art, including cellulose fibers of any natural origin, such as those derived from wood pulp, may be used 20 in a cellulosic layer. Preferred cellulose fibers include, but are not limited to, digested fibers, such as kraft, prehydrolyzed kraft, soda, sulfite, chemi-thermal mechanical, and thermo-mechanical treated fibers, derived from softwood, hardwood or cotton linters. More preferred cellulose fibers include, but are not limited to, kraft digested fibers, including prehydrolyzed kraft digested fibers. Suitable for use in this invention are the 25 cellulose fibers derived from softwoods, such as pines, firs, and spruces. Other suitable cellulose fibers include those derived from Esparto grass, bagasse, kemp, flax and other lignaceous and cellulosic fiber sources. Suitable cellulose fibers include, but are not limited to, bleached Kraft southern pine fibers sold under the trademark FOLEY FLUFFS®, Buckeye Technologies Inc., Memphis, Tennessee. Synthetic fibers include 30 for example polyester such as PET, nylon, polyethylene or polypropylene.

Also preferred is cotton linter pulp, chemically modified cellulose such as crosslinked cellulose fibers and highly purified cellulose fibers, such as Buckeye HPF each available from Buckeye Technologies Inc., Memphis, Tennessee.

The fiber-containing layer may also include thermoplastic binding material, which

- 5 may be blended with the cellulosic or synthetic fibers. Suitable thermoplastic binding material includes thermoplastic fibers, such as bicomponent thermoplastic fibers (bico). Preferred thermoplastic binding fibers provide enhanced adhesion for a wide range of materials, including synthetic and natural fibers, particles, and synthetic and natural carrier sheets. An exemplary thermoplastic bico fiber is Celbond Type 255 Bico fiber
- 10 from KoSa, Charlotte, North Carolina.

Bicomponent fibers having a core and sheath are known in the art. Many varieties are used in the manufacture of nonwoven materials, particularly those produced by airlaid techniques. Various bicomponent fibers suitable for use in the present invention are disclosed in U.S. Patents 5,372,885 and 5,456,982, both of which are

15 hereby incorporated by reference in their entirety. Examples of bicomponent fiber manufacturers include KoSa (Salisbury, NC), Trevira (Bobingen, Germany) and ES Fiber Visions (Athens, GA).

Bicomponent fibers may incorporate a variety of polymers as their core and sheath components. Bicomponent fibers that have a PE (polyethylene) or modified PE

20 sheath typically have a PET (polyethyleneterephthalate) or PP (polypropylene) core. In one embodiment, the bicomponent fiber has a core made of polyester and sheath made of polyethylene. The denier of the fiber preferably ranges from about 1.0 dpf to about 4.0 dpf, and more preferably from about 1.5 dpf to about 2.5 dpf. The length of the fiber is preferably from about 3 mm to about 12 mm, more preferably from about 4.5 mm to

25 about 7.5 mm.

Various geometries can be used for the bicomponent fiber of this invention, including concentric, eccentric, islands-in-the-sea, and side-by-side. The relative weight percentages of the core and sheath components of the total fiber may be varied.

The present invention may also include a latex binder. Preferred binders include

30 but are not limited to ethyl vinyl acetate copolymer such as AirFlex 124 (Air Products, Allentown, Pennsylvania) with 10% solids and 0.75% by weight Aerosol OT (Cytec

Industries, West Paterson, New Jersey), which is an anionic surfactant. Other classes of emulsion polymer binders such as styrene-butadiene and acrylic binders may also be used.

Various materials, structures and manufacturing processes useful in the practice
5 of this invention are disclosed in U.S. Patent No.s 6,241,713; 6,353,148; 6,353,148;
6,171,441; 6,159,335; 5,695,486; 6,344,109; 5,068,079; 5,269,049; 5,693,162; 5,922,163;
6,007,653; and 6,355,079; and in U.S. Patent applications with serial numbers and filing
dates, 09/211,935 filed 12/15/98; 09/232,783 filed 1/19/99; 09/719,338 filed 1/17/01;
09/475,850 filed 12/30/99; 09/469,930 filed 12/21/99; 09/578,603 filed 5/25/00;
10 05/593,409 filed 6/14/00; 09/325,764 filed 6/8/99 allowed; 09/774,248 filed 1/30/01; and
09/854,179 filed 5/11/01, all of which are hereby incorporated by reference in their
entirety.

EXAMPLES

15 **Example 1:**

Handsheets were formed on a lab airlaid forming device in two layers. The pads
were built on top of a Spunbond-Meltblown-Meltblown-Spunbond (SMMS)
polypropylene hydrophobic carrier having a basis weight of 17 gsm, NW 58 from First
Quality Nonwovens, Great Neck, NY.

20 Layer 1 was a blend of 55 gsm cellulose fluff, FOLEY FLUFFS®, Buckeye,
Perry, FL, and 9.7 gsm 2.0 dpf x 6mm bicomponent fiber with a polyester core and a
polyethylene sheath, F55 from KoSa, Charlotte, NC, which was deposited directly on the
carrier. Then 5.6 gsm of a pre-mixed powder of sodium bicarbonate and acetylsalicylic
acid from CO₂ Technologies, West Des Moines, IA, was added by hand. The powder
25 had an 88:12 base:acid powder content ratio by weight. The carrier side was sprayed
with 11 gsm of an ethylene vinyl acetate latex with 20 percent solids, EP-1188 from Air
Products, Allentown PA.

Layer 2 was a blend of 110 gsm cellulose fluff, FOLEY FLUFFS®, and 19.4 gsm
bicomponent fiber, KoSa F55, 2.0 dpf x 6mm, which was deposited on top of the powder.
30 The materials were pressed with shims at 5.08 mm (200 mils) thickness and 239.2 kPa

(5000 psi) pressure with platens heated to 150°C for 1 minute. The pads were then cured for 15 minutes at 145°C.

Example 2:

- 5 Handsheets were formed as described in Example 1, except that 11.3 gsm of a pre-mixed powder of sodium bicarbonate and acetylsalicylic acid with an 88:12 base:acid powder content ratio by weight from CO₂ Technologies, was added by hand.

Example 3:

- 10 Handsheets were formed as described in Example 1, except that 22.5 gsm of a pre-mixed powder of sodium bicarbonate and acetylsalicylic acid with an 88:12 base:acid powder content ratio by weight from CO₂ Technologies, was added by hand.

Example 4:

- 15 Handsheets were formed as described in Example 1, except that 33.8 gsm of a pre-mixed powder of sodium bicarbonate and acetylsalicylic acid with an 88:12 base:acid powder content ratio by weight from CO₂ Technologies, was added by hand.

- 20 Examples 1-4 were submitted for a gas generation study. A graph of the outcome of that study appears as Figure 1.

Example 5:

- Nonwoven material was made on a Dan-Web type pilot airlaid machine using three forming heads to deposit three layers on a Spunbond-Meltblown-Meltblown-Spunbond (SMMS) polypropylene hydrophobic carrier having a basis weight of 17 gsm, NW 58 from First Quality Nonwovens, Great Neck, NY.

- Layer 1 was a blend of 29.2 gsm cellulose fluff, FOLEY FLUFFS® and 5.1 gsm of a 1.7 dtex x 4 mm bicomponent fiber with a polypropylene core and a polyethylene sheath, AL-Adhesion-C, Fiber Visions Covington, GA, was deposited on the carrier.
- 30 This layer was sprayed with 5 gsm of Airflex 192, an ethylene vinyl acetate latex used at 15 percent solids, from Air Products, Allentown, PA.

Layer 2 was a blend of 29.2 gsm of FOLEY FLUFFS®, 5.1 gsm Fiber Visions bicomponent fiber, AL-Adhesion-C, 1.7 dtex x 4 mm, and 22.5 gsm of a blend of sodium bicarbonate from Church&Dwight, Princeton, NJ, and citric acid powders. The blend ratio of the powder was 88:12 sodium bicarbonate: citric acid by weight.

5 Layer 3 was a blend of 29.2 gsm FOLEY FLUFFS® and 5.1 gsm Fiber Visions bicomponent fiber, AL-Adhesion-C, 1.7 dtex x 4 mm. This layer was sprayed with 2.5 gsm of Airflex 192, 15% solids. The material was then pressed to a target caliper of 2.74 mm.

10 **Example 6:**

Nonwoven material was made as in Example 5, except that in Layer 1 the fiber blend contained 36.3 gsm of FOLEY FLUFFS® and 6.3 gsm of Fiber Visions bicomponent fiber, AL-Adhesion-C, Layer 2 used 36.3 gsm of FOLEY FLUFFS® and 6.3 gsm of Fiber Visions AL-Adhesion-C, and 22.5 gsm of the bicarbonate citric acid
15 blend and Layer 3 used 36.3 gsm of FOLEY FLUFFS® and 6.3 gsm of Fiber Visions bicomponent fiber, AL-Adhesion-C. Samples were pressed to a target caliper of 3.16 mm.

Example 7:

20 Nonwoven material was made as in Example 5, except that in Layer 1, the fiber blend contained 43.4 gsm of FOLEY FLUFFS® and 7.6 gsm of Fiber Visions bicomponent fiber, AL-Adhesion-C, Layer 2 used 43.6 gsm of FOLEY FLUFFS® and 7.6 gsm of Fiber Visions AL-Adhesion-C, and 22.5 gsm of the bicarbonate citric acid
blend and Layer 3 used 43.4 gsm of FOLEY FLUFFS® and 7.6 gsm of Fiber Visions
25 bicomponent fiber, AL-Adhesion-C. Samples were pressed to a target caliper of 3.61 mm.

Example 8:

Nonwoven material was made as in Example 5, except that in Layer 1, the fiber blend contained 23.4 gsm of FOLEY FLUFFS® and 5.1 gsm of a 2.2 dtex x 3 mm bicomponent fiber with a polyethyleneterephthalate core and a polyethylene sheath,

5 Merge 1663 from Trevira, Frankfurt am Main, Germany, Layer 2 used 43.6 gsm of FOLEY FLUFFS® and 5.1 gsm Merge 1663, and 22.5 gsm of a bicarbonate citric acid blend with base to acid ratio 4:1 by weight and Layer 3 used 43.4 gsm of FOLEY FLUFFS® and 5.1 gsm Merge 1663. Samples were pressed to a target caliper of 2.74 mm. A sample of the material was activated with water and carbon dioxide gas was

10 generated.

Example 9:

Nonwoven material was made as in Example 8, except that in Layer 1 the fiber blend contained 26.7 gsm of FOLEY FLUFFS® and 7.8 gsm of Merge 1663, Layer 2 used 26.7 gsm of FOLEY FLUFFS® and 7.8 gsm Merge 1663, and 102 gsm of the bicarbonate citric acid blend and Layer 3 used 26.7 gsm of FOLEY FLUFFS® and 7.8 gsm Merge 1663. Samples were pressed to a target caliper of 2.8 mm. A sample of the material was activated with water and carbon dioxide gas was generated.

20 **Example 10:**

Nonwoven material was made as in Example 8, except that in Layer 1, the fiber blend contained 40 gsm of FOLEY FLUFFS® and 9.4 gsm of Merge 1663, Layer 2 used 40 gsm of FOLEY FLUFFS® and 9.4 gsm Merge 1663, and 102 gsm of the bicarbonate citric acid blend and Layer 3 used 40 gsm of FOLEY FLUFFS® and 9.4 gsm Merge

25 1663. Samples were pressed to a target caliper of 3.3 mm. A sample of the material was activated with water and carbon dioxide gas was generated.

CLAIMS

What is claimed is:

1. A latent carbon dioxide gas generating material comprising:
 - (A) layer 1 containing fiber and a binder, having a basis weight of from about 25 gsm to about 100 gsm and having inner and outer surfaces,
 - (B) layer 2 containing a carbon dioxide gas generating composition, having a basis weight of from about 5 gsm to about 300 gsm and having upper and lower surfaces, and
 - (C) layer 3 containing fiber and a binder, having a basis weight of from about 25 gsm to about 100 gsm and having inner and outer surfaces, where the inner surface of layer 1 is in contact with the upper surface of layer 2 and the inner surface of layer 3 is in contact with the lower surface of layer 2.
2. The material of claim 1, further comprising a carrier having a basis weight of from about 10 gsm to about 40 gsm which is in contact with the outer surface of layer 1.
3. The material of one of the previous claims, wherein the fiber of layer 1 is cellulosic fiber, synthetic fiber or a mixture thereof.
4. The material of claim 3, wherein the fiber of layer 1 is cellulosic fiber.
5. The material of one of the previous claims, wherein the binder of layer 1 is a synthetic binder fiber, a latex or a combination thereof.
6. The material of claim 5, wherein the synthetic binder fiber of layer 1 is a bicomponent fiber.
7. The material of one of the previous claims, wherein layer 1 contains from about 60 weight percent to about 95 weight percent fiber and from about 5 weight percent

to about 40 weight percent binder, where the weight percentages are based on the total weight of fiber and binder in the layer.

8. The material of one of the previous claims, wherein layer 1 contains a synthetic binder fiber in combination with a latex binder.

9. The material of claim 8, wherein the binder of layer 1 is a combination of from about 25 weight percent to about 75 weight percent synthetic binder fiber and from about 75 weight percent to about 25 weight percent latex where the weight percentages are based on the total weight of binder and the weight percent latex includes latex solids and fluid carrier.

10. The material of one of the previous claims, wherein layer 2 contains a carbon dioxide gas generating composition comprising a weak base and a weak acid.

11. The material of claim 10, wherein the weak acid has a solubility of 0.5 g/100 g of water or greater at 30°C, and has a melting point of 30°C or greater.

12. The material of one of the previous claims, wherein layer 2 contains a salt which is convertible into an acid.

13. The material of claim 11, wherein the acid is citric acid, tartaric acid, succinic acid, fumaric acid, maleic acid, adipic acid, malic acid, oxalic acid, malonic acid, glutaric acid, phthalic acid, metaphosphoric acid, or wherein the salt which is convertible into an acid is an alkali metal salt of citric acid, tartaric acid, succinic acid, fumaric acid, maleic acid, adipic acid, malic acid, oxalic acid, malonic acid, glutaric acid, phthalic acid, metaphosphoric acid or a mixture thereof.

14. The material of claim 10, wherein the weak base contains anionic carbonate or hydrogen carbonate.

15. The material of claim 14, wherein the base contains as a cation an alkali metal, an alkaline earth metal or a transition metal.

16. The material of claim 15, wherein the base is, lead carbonate, calcium carbonate, barium carbonate, strontium carbonate, magnesium carbonate, beryllium carbonate, lithium carbonate, sodium carbonate, potassium carbonate, rubidium carbonate, cesium carbonate, lead hydrogen carbonate, calcium hydrogen carbonate, barium hydrogen carbonate, strontium hydrogen carbonate, magnesium hydrogen carbonate, beryllium hydrogen carbonate, lithium hydrogen carbonate, sodium hydrogen carbonate, potassium hydrogen carbonate, rubidium hydrogen carbonate, cesium hydrogen carbonate, or a mixture thereof.

17. The material of claim 13, wherein the salt which is convertible into an acid is aluminum sulfate, calcium phosphate, alum, a double salt of an alum, potassium aluminum sulfate, sodium dihydrogen phosphate, potassium citrate, sodium maleate, potassium tartrate, sodium fumarate, .

18. The material of claim 10, wherein the acid is citric acid and base is sodium hydrogen carbonate.

19. The material of one of the previous claims, wherein layer 2 contains a carbon dioxide gas generating composition mixed with fiber and binder.

20. The material of claim 19, wherein the fiber of layer 2 is cellulosic fiber, synthetic fiber or a mixture thereof.

21. The material of claim 20, wherein the fiber of layer 2 is cellulosic fiber.

22. The material of one of claims 19-21, wherein the binder of layer 2 is a synthetic binder fiber, a latex or a combination thereof.

23. The material of claim 22, wherein the synthetic binder fiber of layer 2 is a bicomponent fiber.

24. The material of one of the previous claims, wherein layer 2 contains fiber and binder which are from about 60 weight percent to about 95 weight percent fiber and from about 5 weight percent to about 40 weight percent binder, where the weight percentages are based on the total weight of the fiber and binder in the layer.

24. The material of one of claims 19-23, wherein layer 2 contains a synthetic binder fiber in combination with a latex binder.

26. The material of claim 24, wherein the binder of layer 2 is a combination of from about 25 weight percent to about 75 weight percent synthetic binder fiber and from about 75 weight percent to about 25 weight percent latex where the weight percentages are based on the total weight of binder and the weight percent latex includes latex solids and fluid carrier.

27. The material of one of the previous claims, wherein the fiber of layer 3 is cellulosic fiber, synthetic fiber or a mixture thereof.

28. The material of claim 27, wherein the fiber of layer 3 is cellulosic fiber.

29. The material of one of the previous claims, wherein the binder of layer 3 is a synthetic binder fiber, a latex or a combination thereof.

30. The material of claim 29, wherein the synthetic binder fiber of layer 3 is a bicomponent fiber.

31. The material of claim 27, wherein layer 3 contains from about 60 weight percent to about 95 weight percent fiber and from about 5 weight percent to about 40

weight percent binder, where the weight percentages are based on the total weight of the layer.

32. The material of one of the previous claims, wherein layer 3 contains a synthetic binder fiber in combination with a latex binder.

33. The material of claim 32, wherein the binder of layer 3 is a combination of from about 25 weight percent to about 75 weight percent synthetic binder fiber and from about 75 weight percent to about 25 weight percent latex where the weight percentages are based on the total weight of binder and the weight percent latex includes latex solids and fluid carrier.

34. The material of one of the previous claims, wherein the basis weight of the material is from about 65 gsm to about 500 gsm.

35. The material of claim 34, wherein the basis weight of the material is from about 65 gsm to about 140 gsm.

36. The material of claim 34, wherein the basis weight of the material is from about 141 gsm to about 300 gsm.

37. The material of claim 34, wherein the basis weight of the material is from about 301 gsm to about 500 gsm.

38. The material of one of the previous claims, wherein the carbon dioxide gas generating composition is from about 3 weight percent to about 20 weight percent based on the total weight of the material.

39. The material of one of claims 1-37, wherein the carbon dioxide gas generating composition is from about 21 weight percent to about 40 weight percent based on the total weight of the material.

40. The material of one of claims 1-37, wherein the carbon dioxide gas generating composition is from about 41 weight percent to about 60 weight percent based on the total weight of the material.

41. The material of one of the previous claims, wherein the ratio by weight of acid to base in the carbon dioxide gas generating composition is from about 10:1 to about 1:10.

42. The material of claim 41, wherein the ratio by weight of acid to base in the carbon dioxide gas generating composition is from about 5:1 to about 1:5.

43. The material of one of the previous claims, wherein the ratio of equivalents of acid to equivalents of base in the carbon dioxide gas generating composition is from about 5:1 to about 1:5.

44. The material of claim 43, wherein the ratio of equivalent of acid to equivalents of base in the carbon dioxide gas generating composition is from about 3:2 to about 2:3.

45. The material of one of the previous claims, wherein the carbon dioxide gas generating composition contains a hydrophilic material with a hygroscopicity of from about 80 weight percent to about 250 weight percent based on the weight of the hydrophilic material at 30°C.


46. The material of claim 45, wherein the hydrophilic material is a saccharide or derivative thereof, polyhydric alcohol or derivative thereof, polyacrylamide or derivative thereof, polyelectrolyte or a water absorbing polymer.

47. The material of claim 46, wherein the hydrophilic material is erythrose, threose, arabinose, xylose, lyxose, glucose, fructose, mannose, galactose, sorbitol, gluconic acid, sucrose, lactose, maltose, dextrin, amylose or hydroxymethyl cellulose.

48. The material of one of the previous claims, wherein the carbon dioxide gas generating composition contains a hydrophobic material.

49. The material of claim 48, wherein the hydrophobic material is a wax, a fatty acid or a salt or ester of a fatty acid.

Figure 1

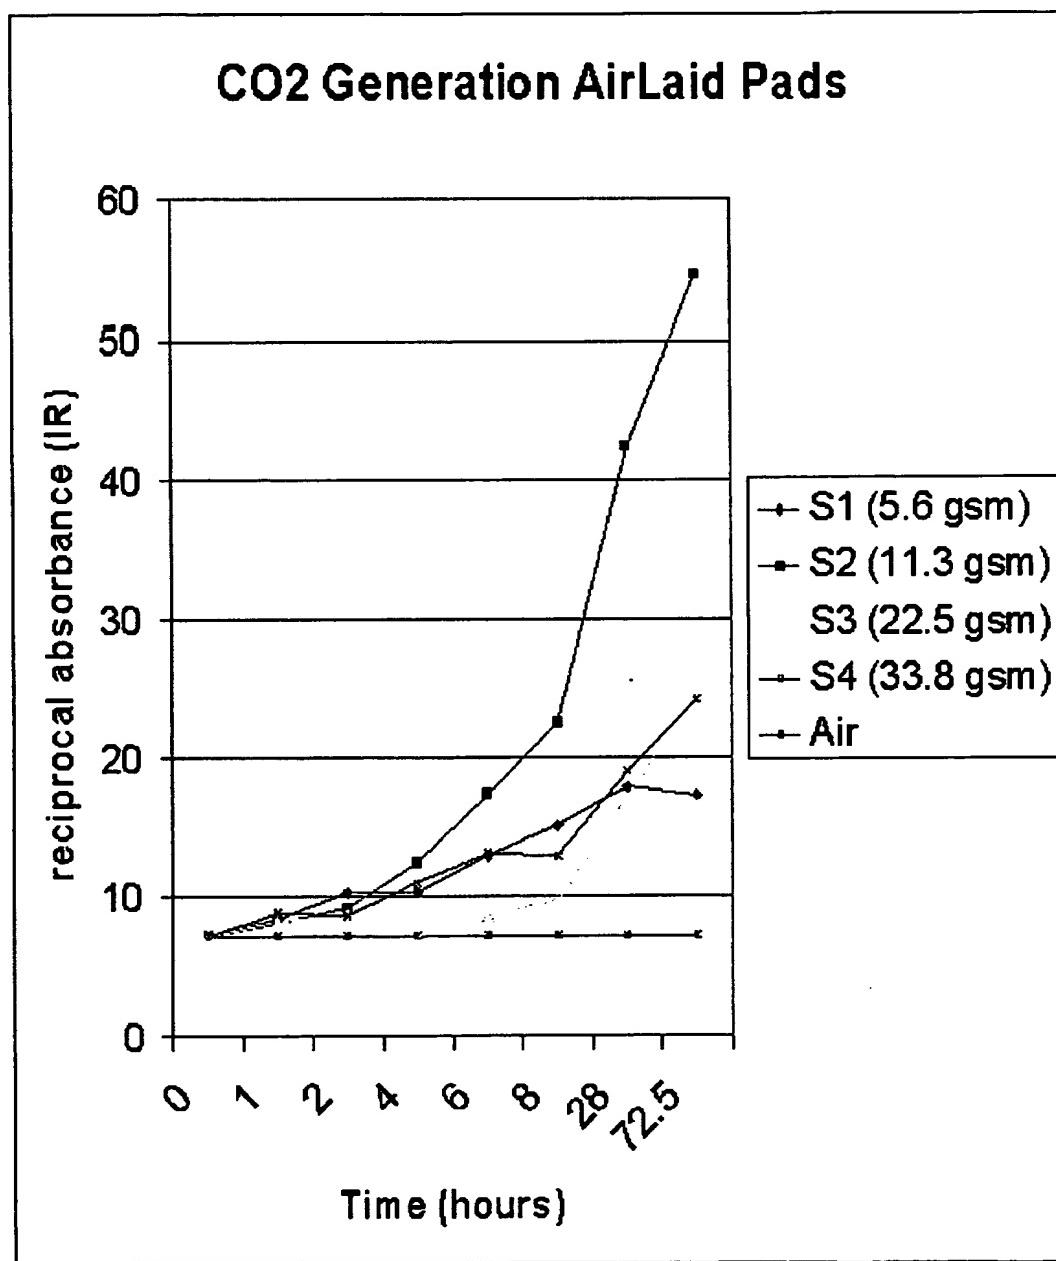

BEST AVAILABLE COPY

Application Data Sheet

Application Information

Application Type:: Provisional
Subject Matter:: Utility
Suggested Group Art Unit:: N/A
CD-ROM or CD-R?:: None
Sequence submission?:: None
Computer Readable Form (CRF)?:: No
Title:: LATENT CARBON DIOXIDE GENERATING MATERIAL
Attorney Docket Number:: 01313/0200131-US0
Request for Early Publication?:: No
Request for Non-Publication?:: No
Small Entity?:: No
Petition included?:: No
Secrecy Order in Parent Appl.?:: No

Applicant Information

Applicant Authority Type:: Inventor
Primary Citizenship Country:: Canada
Status:: Full Capacity
Given Name:: Brian
Middle Name:: E.
Family Name:: Boehmer
City of Residence:: Bartlett
State or Province of Residence:: TN
Country of Residence:: US
Street of mailing address:: 6348 Daybreak Drive
City of mailing address:: Bartlett
State or Province of mailing address:: TN
Postal or Zip Code of mailing address:: 38135

Applicant Authority Type:: Inventor
Primary Citizenship Country:: US
Status:: Full Capacity
Given Name:: Joshua
Middle Name:: D.
Family Name:: Crews
City of Residence:: Memphis
State or Province of Residence:: TN
Country of Residence:: US
Street of mailing address:: 1405 Summer Brook Lane, Apt. 5
City of mailing address:: Memphis
State or Province of mailing address:: TN
Postal or Zip Code of mailing address:: 38134

Applicant Authority Type:: Inventor
Primary Citizenship Country:: US
Status:: Full Capacity
Given Name:: John
Middle Name:: P.
Family Name:: Erspamer
City of Residence:: Lakeland
State or Province of Residence:: TN
Country of Residence:: US
Street of mailing address:: 9580 Elm Point Cove
City of mailing address:: Lakeland
State or Province of mailing address:: TN
Postal or Zip Code of mailing address:: 38002

Correspondence Information

Correspondence Customer Number:: 07278

Representative Information

Representative Customer Number:: 07278

Assignee Information

Assignee name:: BKI Holding Corporation
Street of mailing address:: 300 Delaware Avenue
Suite 900
City of mailing address:: Wilmington
State or Province of mailing address:: DE
Postal or Zip Code of mailing address:: 19081

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/US04/033540

International filing date: 07 October 2004 (07.10.2004)

Document type: Certified copy of priority document

Document details: Country/Office: US
Number: 60/509,820
Filing date: 08 October 2003 (08.10.2003)

Date of receipt at the International Bureau: 18 November 2004 (18.11.2004)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse